


Doonan Specialized Trailer, LLC

Boat Trailer Models

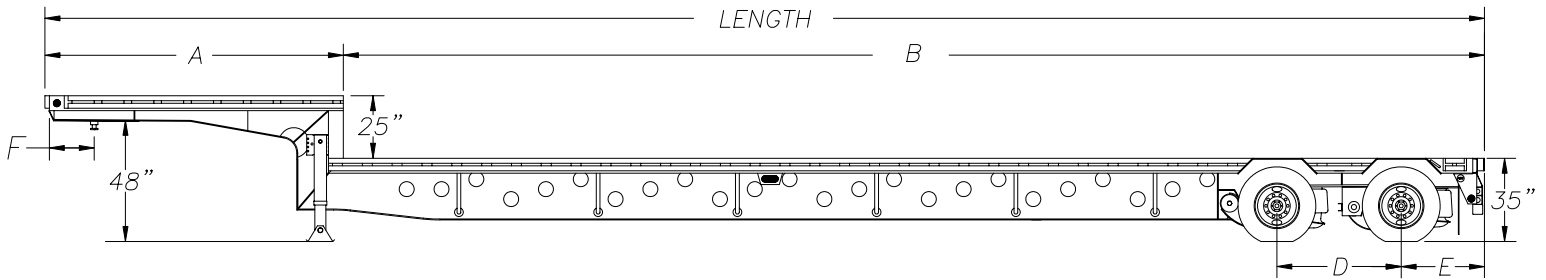

| Model # | Dimensions | | | | | Estimated Weight (lbs.) |
|----------|---------------|----------------|-------------|---------------|---------------|-------------------------|
| | Top Deck A | Main Deck B | Spread D | Overhang E | King Pin F | |
| 482DB14B | 10' | 38' | 49" | 33 1/2" | 18" | 11,600 |

Standard Features and Equipment

- 90,000# G.V.W., 50,000# Concentrated in 10' (unless otherwise specified)
- Main Beams - 1/2" x 5" Steel Flanges on High Yield Steel Web
- 5' Rear Pullout Extension
- "V'd" Crossmembers
- 4" Cross members on 14" Centers
- 6" Structural Channel Side Rails
- Stake Pockets on 12" Centers
- Dual Rubrail 5/16" x 2" Top Rubrail
5/16" x 1 1/2" Bottom Rubrail
- 48" Fifth Wheel Height
- (4) Sensor, (2) Module Antilock Braking System
- Hendrickson Turner Air Ride Suspension
- Meritor Axles
- Cast Hubs, Cast Outboard Drums
- 8 Hole Steel Wheels (Hub Pilot Mount)
- 245/70R17.5 Radial Tires
- Automatic Slack Adjusters
- 1 1/8" Apitong Floor – Double Screwed (5/16" Screws)
- 5/16" Plastic Flooring in "V'd" Section of Trailer
- Sealed Beam Lighting System
 - (3) Clearance Lights per Side
 - (3) Marker Lights in Center Rear Panel
 - (4) Stop/Turn/Tail Lights per Side
- 49CFR571.223 & 571.224 D.O.T. Certified Rear Impact Guard