


Doonan Specialized Trailer, LLC Spread Axle Flatbed Models

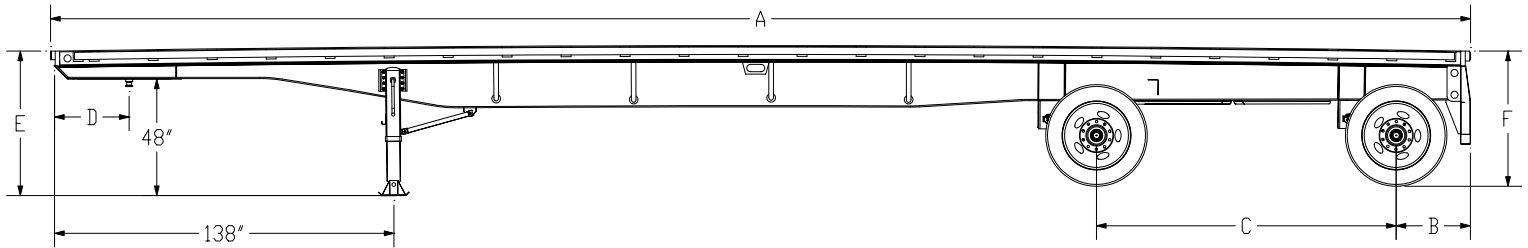

Model #	Dimensions				Estimated Weight (lbs)
	Length A	Overhang B	Axle Spread C	King Pin D	
452FB14	45'	30"	122"	30"	10,400
482FB14	48'	30"	122"	30"	10,600
502FB14	50'	30"	122"	30"	10,850
532FB14	53'	30"	122"	30"	11,200

The following dimensions are based on a 30" King Pin and 39.7" Diameter Tires
 Front Height (E) = 59-3/4"
 Rear Height (F) = 54-1/2"

Standard Features and Equipment

- 90,000# G.V.W.R, 60,000# Concentrated in 10'
- Main Beams – 3/8" x 5" Top Flange
1/2" x 5" Bottom Flange
7GA High Strength Web
- 4" Steel Crossmembers on 12", 14", or 16" Centers
- 6" Structural Channel Siderails
- 5/16" x 2 1/2" Rubrail
- Stake Pockets on 24" Centers
- Dual Spool Spacers between Stake Pockets
- Stake Pockets, Spool Spacers, and Rubrail on Rear
- Stake Pockets on Front
- 48" Fifthwheel Height
- (4) Sensor, (2) Module Antilock Braking System
- Hendrickson Intraax Suspension
- Cast Hubs, Outboard Cast Drums
- Hub Piloted 10 Hole Steel Wheels
- General ST250 295/75R22.5 Tires
- Automatic Slack Adjusters
- 1-1/8" Apitong Flooring
- Sealed Beam Grote LED Lighting System
- Jost Landing Gear